




Description

Interweave LVT brings the traditional linen-weave look into commercially designed spaces for a clean, classic flooring option. Interweave LVT features an enhanced urethane wear layer which includes quartz. This enhanced wear layer creates a barrier against dirt, scuffs, and stains.

Colors

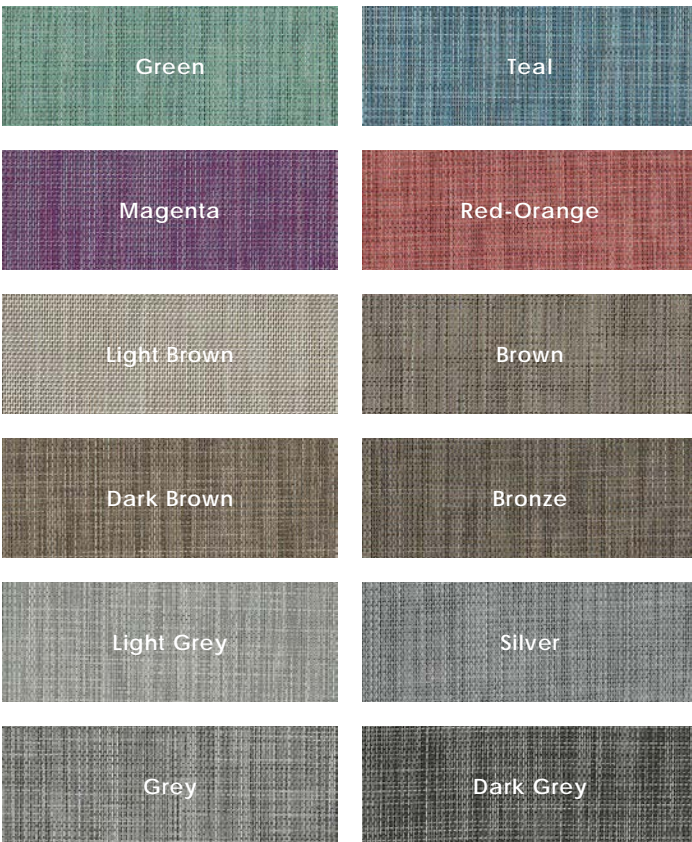


Technical Data

Specification Reference	Test Method	Test Result
Static Load	ASTM F970	Passes - 2,000 PSI
Heat Resistance	ASTM F1514	Passes
Light Resistance	ASTM F1515	Passes
Chemical Resistance	ASTM F925	Passes
Smoke Density	ASTM E662	Passes < 450
Flexibility	ASTM F137	Passes, 1" Mandrel
Residual Indentation	ASTM F1914	Passes < 8% Avg.
Flooring Radiant Panel	ASTM E648	Passes, Class 1
Classification	ASTM F1700	Class II

Body Type	Installation
Luxury Vinyl Tile (LVT)	Glue Down



Sizes

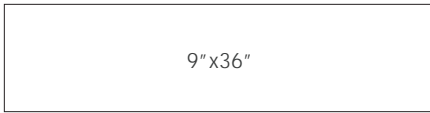

Wear Layer & Thickness

40 Mil | 3mm

Lead Time

2-4 Weeks
Domestic Inventory


Edge Profile

Square


Location

South Korea


Patterns

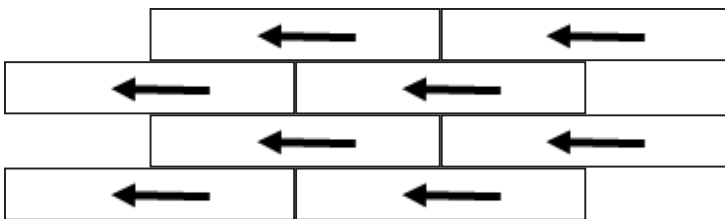


Brick

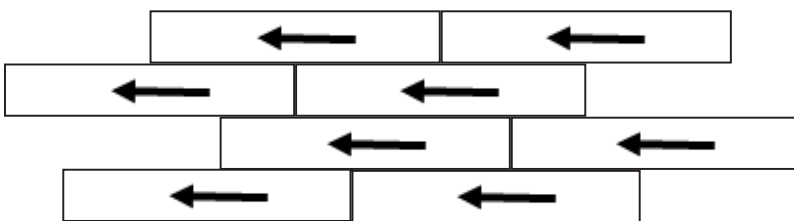

Stagger


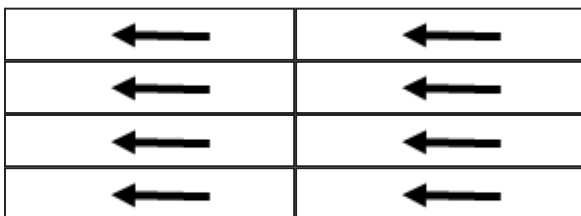



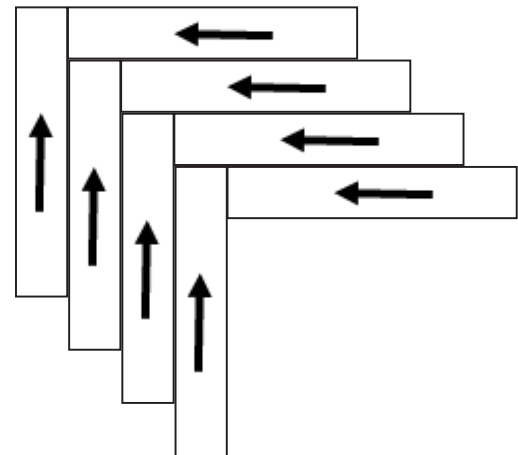


Monolithic



Herringbone

Color•Size•Finish Matrix

Color — Size & Thickness						
9"x36"x3mm	Green	Teal	Magenta	Red-Orange	Light Brown	Brown

Color — Size & Thickness						
9"x36"x3mm	Dark Brown	Bronze	Light Grey	Silver	Grey	Dark Grey



Dark Grey, Light Grey, Teal

Chart indicates available size, color, finish and thickness options. Shaded block indicates not available. Sizing is nominal for field tile, trims, and decors.

