




Ash


Description

Anchor LVT is designed to be the visual foundation of any room and provides a robust surface that enhances the aesthetic of interiors. With its authentic wood-like appearance, this collection brings a warm ambiance while setting the stage for sophisticated design.


Colors

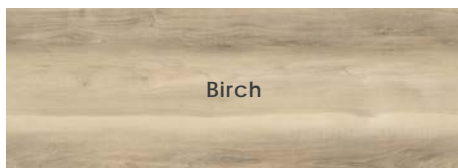


Birch

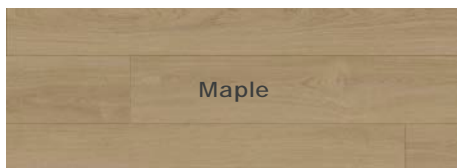


Maple

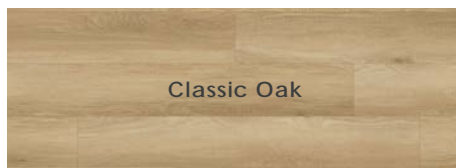


Classic Oak

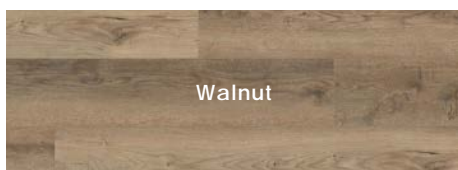


Walnut

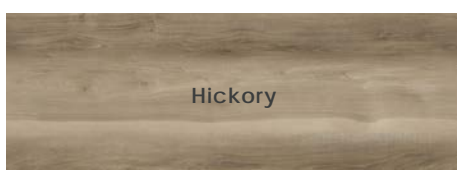


Hickory

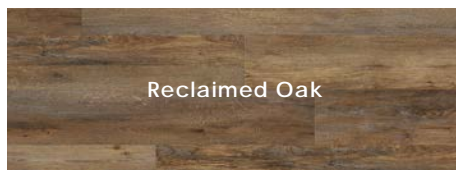

Reclaimed Oak

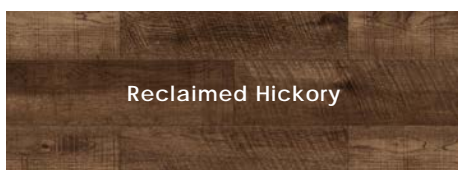

Reclaimed Hickory

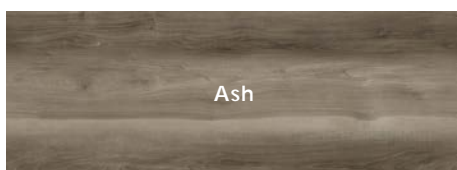


Ash



Grey Stained Oak

Sizes



7"x48"

Wear Layer & Thickness

20 Mil | 2.5mm

Edge Profile

Square

Lead Time

1-2 Weeks

Availability


Domestic Inventory




Technical Data

Specification Reference	Test Method	Test Result
Static Load	ASTM F970	Passes - 1,000 PSI
Light Resistance	ASTM F1515	Passes
Chemical Resistance	ASTM F925	Passes
Smoke Density	ASTM E662	Passes < 450
Dimensional Stability	ASTM F2199	Passes
Flexibility	ASTM F1317	Passes
Flooring Radiant Panel	ASTM E648	Passes, Class 1
Classification	ASTM F1700	Class III, Type B


Body Type	Installation
Luxury Vinyl Tile (LVT)	Glue Down

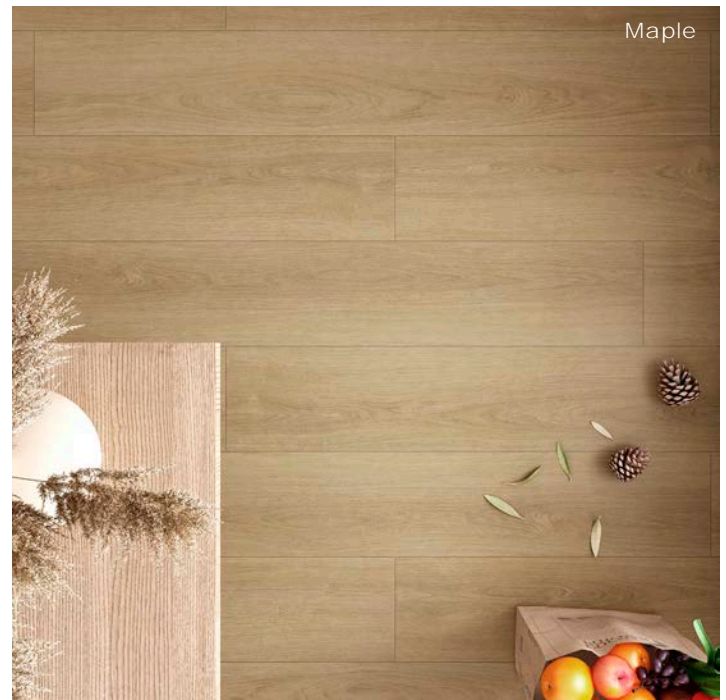


Patterns

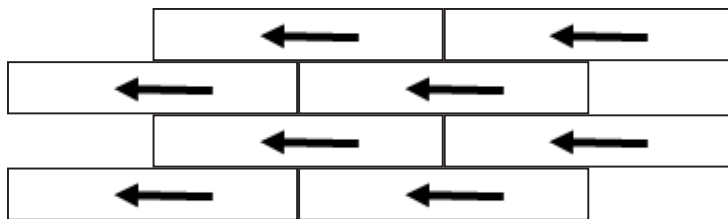


Brick

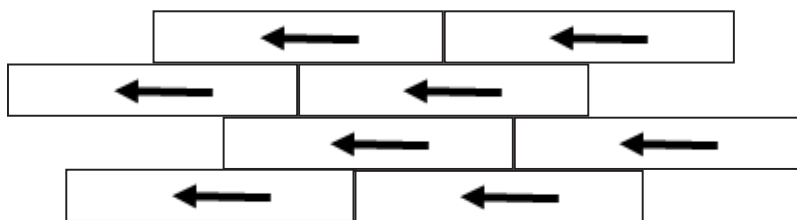

Stagger

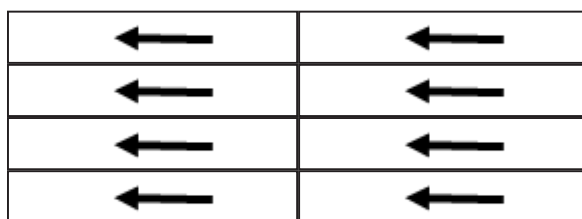

Monolithic

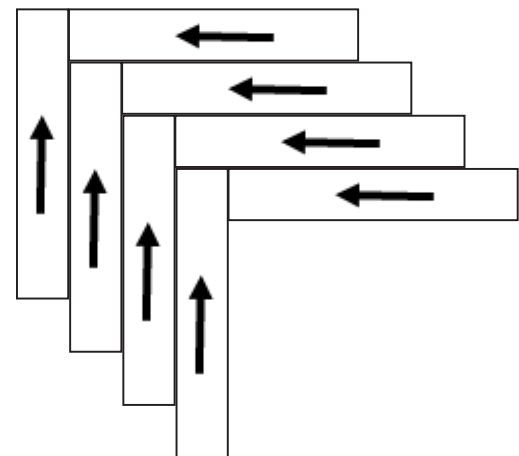

Herringbone

Color•Size•Finish Matrix

Color — Size & Thickness			
7" x 48" x 2.5mm	Birch	Maple	Classic Oak
Color — Size & Thickness			
7" x 48" x 2.5mm	Walnut	Hickory	Reclaimed Oak
Color — Size & Thickness			
7" x 48" x 2.5mm	Reclaimed Hickory	Ash	Grey Stained Oak



Chart indicates available size, color, finish and thickness options. Shaded block indicates not available. Sizing is nominal for field tile, trims, and decors.

